



## BUILDING INTO FLAMMABLE MATERIAL WITH FIRE WALL

Building in the Scan 5004 FRL with radiation shields against a flammable wall protected by a fire wall.

-  Flammable material
-  Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities

All distances are in mm.

All distances are minimum distances


Distance to furniture: 800 mm. from glass

\* Distance to glass

\*\* Distance to flammable floor

### Installation with an insulated, vertical flue pipe

- structure/surround to ceiling

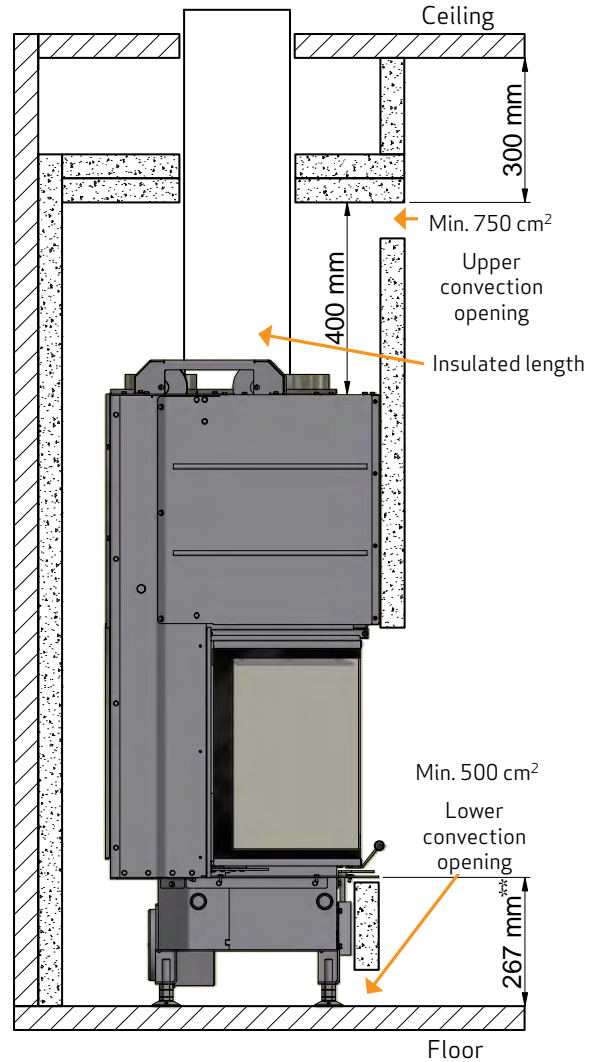

### Installation with an insulated, vertical flue pipe

- open structure/surround

