




Scan 67 1600 mm

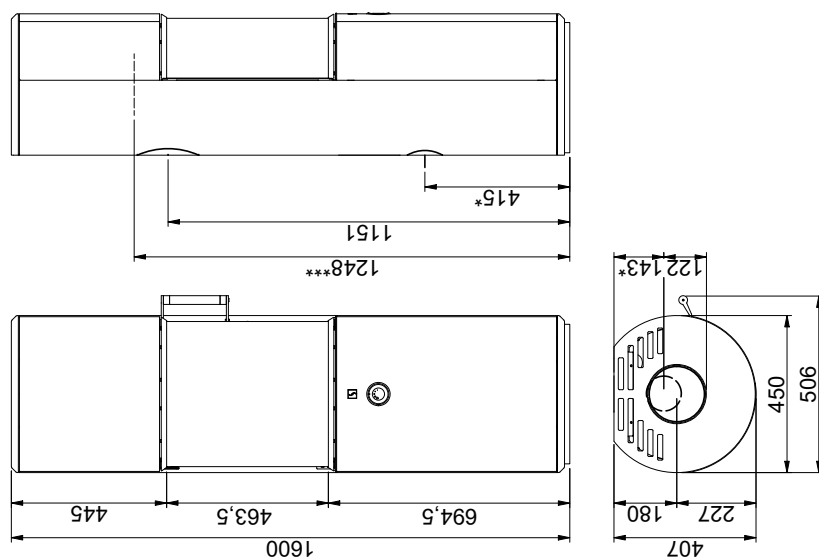


Scan 671300 mm

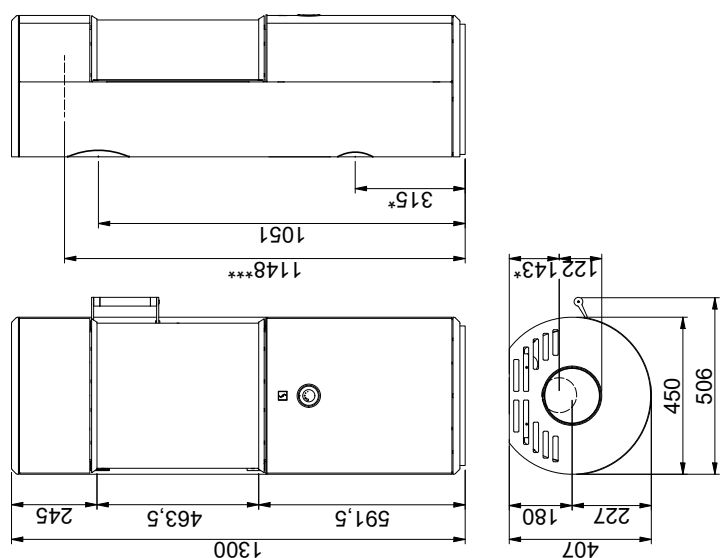

Scan 67 1000 mm

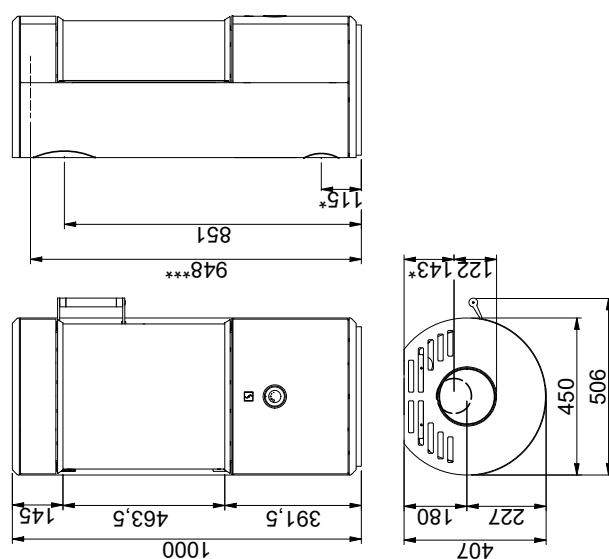

Floor plate

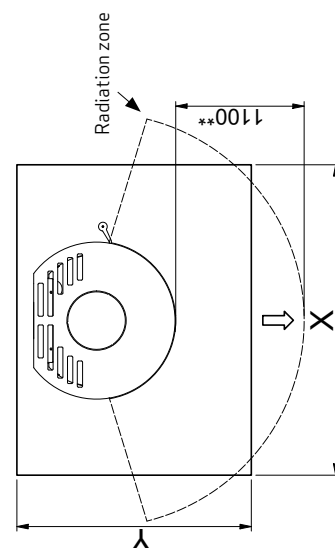

X/Y according to national laws and regulations

Flammable material



All distances are in mm.


All distances are minimum distances

* Connection of fresh-air intake Ø 100 mm


*** Min. distance to furniture/flammable material

*** Height to the beginning of flue connecting piece at top outlet



Flammable ceiling
(Scan 67 1600 mm)

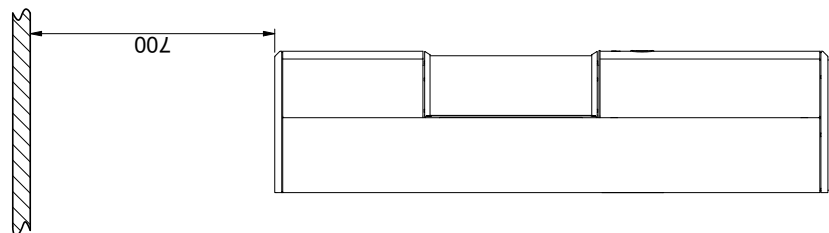

Minimum distance to flammable materials

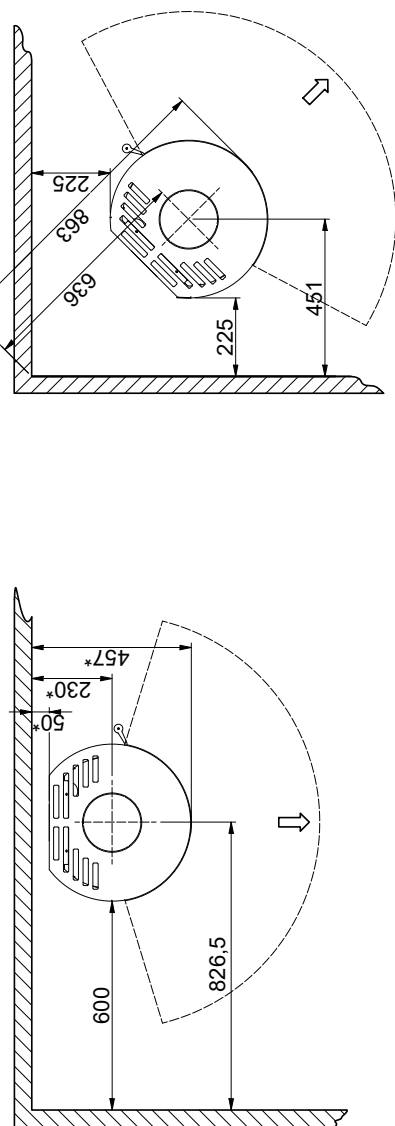

Minimum distance to flammable wall protected by a fire wall

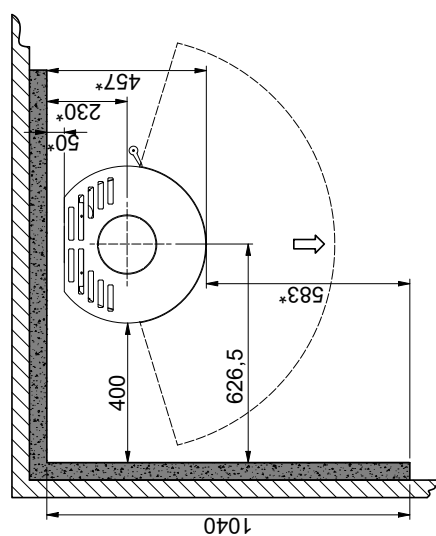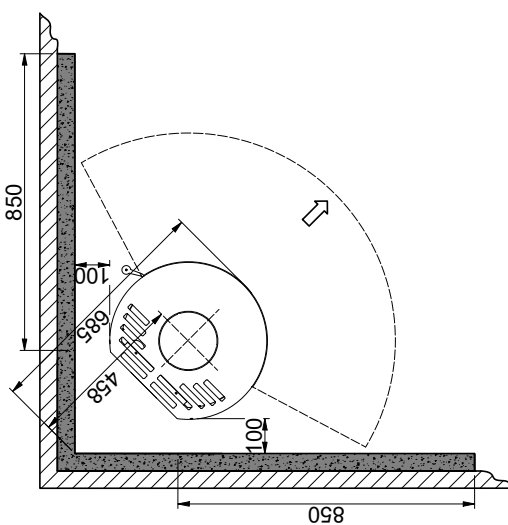

Flammable material

Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities

All distances are in mm.

All distances are minimum distances.

*Half-insulated chimney/shielded flue pipe (The requirements to the chimney and the flue pipe in terms of safety distances must be met)